

VELOCITY

Velocity is designed for ultra-high-performance wrapping that comes with all the greatness of NEXT with improved tear propagation and puncture resistance.



Empower Ultra High Performance



Better Tear Propagation Resistance



Improved Puncture Resistance



Offer Superior Load Containment



Thin Yet Tough Promote Sustainability




Consistent Quality Performance


TECHNICAL DATA

Thickness	12 μm $\pm$ 1 μm
Material	LLDPE
Width	500 m

Possibility of customisation: For customisation, please consult your sales representative

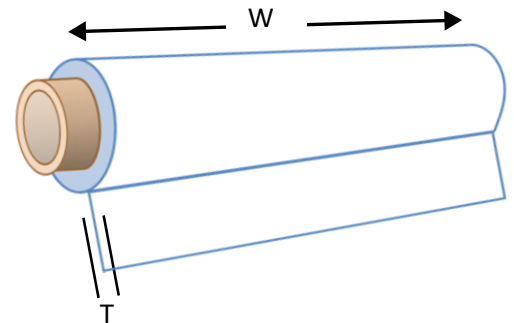

Mechanical Properties	Typical Value	Test Method
Tensile Strength at MD	≥ 30.50 MPa	ASTM D882
Tensile Strength at TD	≥ 19.30 MPa	ASTM D882
Break Elongation at MD	≥ 385 %	ASTM D882
Break Elongation at TD	≥ 490 %	ASTM D882
Dart Drop	≥ 109 g	ASTM D1709
Puncture Force	≥ 14.0 N	FPT-750
Optimum Working Zone	210 ~ 240 %	FPT-750

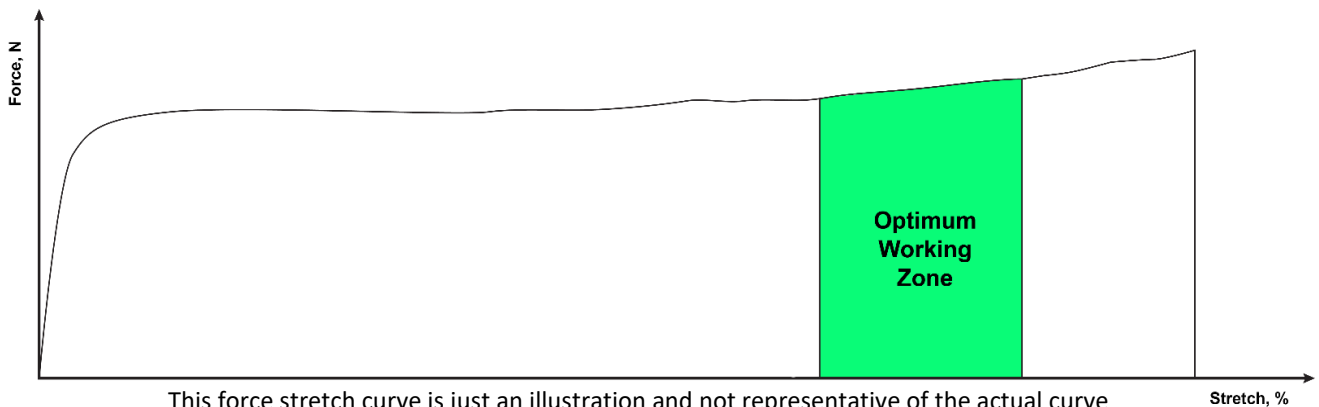

TG
STRETCH



Effective: 1 November